


Dati tecnici valvole unidirezionali

Unidirectional valves technical data
Technischen Daten der Rückschlagventile

Fluido Aria compressa	Fluid Compressed air	Fluid Druckluft
Pressione di esercizio Da 0 a 10 bar	Working pressure From 0 to 150 PSI	Druck Von 0 bis 10 bar
Tenuta al vuoto - 750 mm Hg 10Torr	Vacuum -29,5 in Hg	Vakuumdichtigkeit -750 mm Hg 10Torr
Temperatura di utilizzo Da 0 ÷ 60°C	Temperature range From 32 to 140°F	Einsatztemperatur Von 0 bis 60°C
Tubi consigliati 1) Poliuretano - 2) Nylon	Recommended tubes 1) Polyurethane - 2) Nylon	Rohrmpfehlungen 1) Polyurethan - 2) Nylon
Materiali Corpo Ottone nichelato – alluminio - resina (PBT) Pinza Acciaio SUS 301 Pulsante Resina (POM) O-Ring NBR	Materials Body Nickel plated brass – aluminium - resin (PBT) Lock claws SUS 301 Steel Sleeve Resin (POM) O-Ring NBR	Werkstoffen Körper Vernickelt Messing - Aluminium - Harz (PBT) Bremsattel Stahl SUS 301 Taste Harz (POM) O-Ringe NBR
Filettatura BSPT conica teflonata. Metrica.	Thread types BSPT taper with teflon. Metric.	Gewinde BSPT konisch mit Teflon. Metrisch.
Diametri e filetti Da 4 mm a 12 mm. Da M5 a 1/2".	Diameters and threads From 4 mm to 12 mm. From M5 to 1/2".	Durchmesser und Gewinde Von 4 mm bis 14 mm. Von M5 bis 1/2".
Note Le valvole unidirezionali permettono il passaggio dell'aria in una sola direzione.	Note Check valves airflow is only in one direction.	Notizen Die Einwegventile den Durchtritt von Luft in eine Richtung.

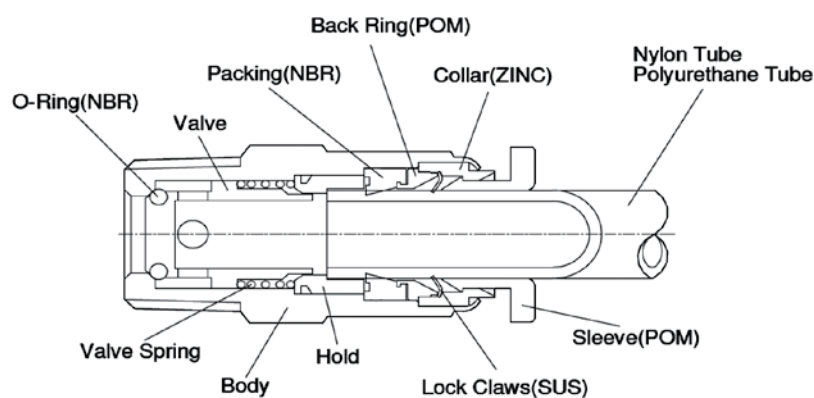

Raccordi di arresto - Valvole unidirezionali - Valvole 3 vie

Stop fittings - Unidirectional valves - 3 hand valves

Stopverschraubung - Rückschlagventile - 3 Wege Ventile

RF 20K




Valvola unidirezionale dritto maschio conico BSPT

Unidirectional valve male straight taper BSPT

Rückschlagverschraubung Aussengewinde konisches Gewinde

Codice/Code	ØD	R	L1	L2	ØP	1/2"	3/4"	1"
RF20M504	4	M5	3.5	31	10	10		10
RF20M604	4	M6	4	31.5	10	10		10
RF20K1804	4	R1/8	7.5	25	10	10		10
RF20K1806	6	R1/8	7.5	31	12	12		10
RF20K1406	6	R1/4	9.5	33	12	14		10
RF20K1808	8	R1/8	7.5	32.8	14	14		10
RF20K1408	8	R1/4	9.5	34.8	14	14		10
RF20K3810	10	R3/8	10.5	41	17	17		10
RF20K1210	10	R1/2	13.5	43	17	21		10
RF20K3812	12	R3/8	10.5	42.5	20	21		10
RF20K1212	12	R1/2	13.5	44.5	20	21		10

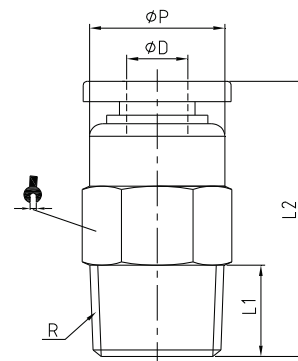

RF 21K




Valvola unidirezionale maschio-femmina conico BSPT

Unidirectional valve male-female taper BSPT

Rückschlagverschraubung Innen/Aussengewinde konisches Gewinde

Codice/Code	R	RC	L1	L2	L	1/2"	3/4"	1"
RF21K1818	R1/8	Rc1/8	7.5	8.5	25.2	14		10
RF21K1414	R1/4	Rc1/4	9.5	11	29.8	17		10
RF21K3838	R3/8	Rc3/8	10.5	12	33.5	21		10
RF21K1212	R1/2	Rc1/2	13.5	14	37	24		10



RF 22



Valvola unidirezionale intermedia

Unidirectional valve intermediate

Rückschlagverbinder

Codice/Code	ØD	ØP	L	1/2"	3/4"	1"	1 1/2"	2"
RF220004	4	13	47					10
RF220006	6	13	46					10
RF220008	8	15	51					10
RF220010	10	19	62					10
RF220012	12	21.5	64					10

