

Raccordi ad innesto rapido in polimero

Plastic push-in fittings

Steckverschraubungen Kunststoff

Dati tecnici dei raccordi rapidi in polimero

Plastic push-in fittings technical data

Technischen Daten der Steckverschraubungen Kunststoff

Fluido Aria compressa (altri fluidi a richiesta)	Fluid Compressed air (other fluids on request)	Fluid Druckluft (andere Medien auf Anfrage)
Pressione di esercizio Tubo pressione Ø4 – Ø16 mm 0 ÷ 10 Bar 0 ÷ 150 PSI	Working pressure Tube Pressure Ø4 – Ø16 mm 0 ÷ 10 Bar 0 ÷ 150 PSI	Druck Schlauch Druck Ø4 – Ø16mm 0 ÷ 10 Bar 0 ÷ 150 PSI
Temperatura di utilizzo 0 ÷ 60°C	Temperature range 32 ÷ 140 °F	Einsatztemperatur 0 ÷ 60°C
Tubi consigliati 1)Poliuretano - 2)Poliammide - 3)Polietilene - 4)Nylon	Recommended tubes 1)Polyurethane - 2)Polyamide - 3)Polyethylene - 4)Nylon	Rohrempfehlungen 1) Polyurethan - 2) Polyamid - 3) Polyethylen - 4) Nylon
Tolleranze ± 0.10 mm	Tolerances ± 0.10 mm	Toleranzen ± 0.10 mm
Materiali Corpo: Ottone nichelato o resina acetaleica Pinza: Acciaio SUS 301 Pulsante: Resina acetaleica O-Ring: NBR	Materials Body: Nickel plated brass or acetal resin Lock claws: SUS 301 Steel Sleeve: Acetal resin O-Ring: NBR	Werkstoffen Körper: vernickelt Messing oder Acetalic Bremssattel: Stahl SUS 301 Taste: Acetal O-Ringe: NBR
Filettatura BSPP cilindrica - BSPT conica teflonata - Metrica	Thread types BSPP parallel - BSPT taper with teflon - Metric.	Gewinde BSPP zylindrisch - BSPT konische mit Teflon - Metrische
Diametri e filetti Diametri da 4 mm a 16 mm - Filettature da M5 a 1/2"	Threads and diameters Diameters from 4 mm to 16 mm - Threads from M5 to 1/2"	Durchmesser und Gewinde Durchmesser von 4 mm bis 14 mm - Gewinde von M5 bis 1/2"
Caratteristiche principali 1. Tenuta al vuoto - 750 mmHG (10Torr) 2. Montaggio istantaneo 3. Passaggio pieno, nessuna riduzione della portata 4. Ingombri ottimizzati	Main features 1. Vacuum - 750 mmHG (10Torr) 2. Instant connection 3. Full passage, no reduction flow 4. Optimized dimensions	Haupteigenschaften 1. Vakuumdichtigkeit - 750 mmHG (10Torr) 2. Sofortige Installation 3. Voller Durchgang, keine Reduktion im Umfang 4. Optimierte Abmessungen

RP 51K-G new




Diritto maschio conico BSPT

Male straight taper BSPT

Gerade Einschraubverschraubung konisches Gewinde

Code/Code	ØD	R"	L1	L2	Ø	Ø	Ø	Ø	Ø
RP51K1804G	4	R1/8	7.5	20	3	10			10
RP51K1404G	4	R1/4	9.5	18	3	14			10
RP51K1806G	6	R1/8	7.5	20.5	4	12			10
RP51K1406G	6	R1/4	9.5	22.5	4	14			10
RP51K3806G	6	R3/8	10.5	20.5	4	17			10
RP51K1808G	8	R1/8	7.5	25.5	5	14			10
RP51K1408G	8	R1/4	9.5	24.5	5	14			10
RP51K3808G	8	R3/8	10.5	21.5	6	17			10
RP51K1208G	8	R1/2	13.5	25.5	6	21			10
RP51K1810G	10	R1/8	7.5	29.5	5	17			10
RP51K1410G	10	R1/4	9.5	31	6	17			10
RP51K3810G	10	R3/8	10.5	28.5	8	17			10
RP51K1210G	10	R1/2	13.5	26.5	8	21			10
RP51K1812G	12	R1/8	7.5	30	5	21			10
RP51K1412G	12	R1/4	9.5	30	6	21			10
RP51K3812G	12	R3/8	10.5	29	8	21			10
RP51K1212G	12	R1/2	13.5	32.5	8	21			10
RP51K3814G	14	R3/8	10.5	34	8	22			10
RP51K1214G	14	R1/2	13.5	33	10	22			10
RP51K3815G	15	R3/8	10.5	37	8	24			10
RP51K1215G	15	R1/2	13.5	35	10	24			10
RP51K3816G	16	R3/8	10.5	37.5	8	24			10
RP51K1216G	16	R1/2	13.5	39.5	10	24			10



RP 51TK-G new




Diritto tondo maschio conico BSPT

Round male straight taper BSPT

Rund Gerade Einschraubverschraubung, konisches Gewinde

Code/Code	ØD	R"	L1	L2	ØD1	Ø	Ø	Ø	Ø
RP51TK1804G	4	R1/8	7.5	20	10	3			10
RP51TK1806G	6	R1/8	7.5	20.5	12	4			10
RP51TK1406G	6	R1/4	9.5	22.5	14	4			10
RP51TK1808G	8	R1/8	7.5	25.5	14	5			10
RP51TK1408G	8	R1/4	9.5	24.5	14	5			10
RP51TK3810G	10	R3/8	10.5	28.5	17	8			10
RP51TK3812G	12	R3/8	10.5	30	21	8			10



RP 51-G new




Diritto maschio cilindrico BSPP-metrico

Male straight parallel BSPP-metric

Gerade Einschraubverschraubung zylindrisches Gewinde

Code/Code	ØD	G"	D1	ØD2	L1	L2	Ø	Ø	Ø	Ø
RP51M504G	4	M5	10	8	3.5	20.3	2	10	10	10
RP51M604G	4	M6	10	9	4	20.8	2	10	10	10
RP511804G	4	G1/8	12	14	5.5	19.5	3	10	10	10
RP511404G	4	G1/4	12	17	7.5	18.6	3	10	10	10
RP51M506G	6	M5	12	8	3.5	21	2	12	10	10
RP51M606G	6	M6	12	9	4	21	2	12	10	10
RP511806G	6	G1/8	14	14	5.5	22	4	12	10	10
RP511406G	6	G1/4	14	17	7.5	22.5	4	12	10	10
RP513806G	6	G3/8	14	20	7.5	20.3	4	12	10	10
RP511808G	8	G1/8	16	14	5.5	25	4	14	10	10
RP511408G	8	G1/4	16	17	7.5	24	5	14	10	10
RP513808G	8	G3/8	16	20	7.5	20.5	6	14	10	10
RP511208G	8	G1/2	16	24	10	24	6	14	10	10
RP511810G	10	G1/8	19.5	14	5.5	29	4	17	10	10
RP511410G	10	G1/4	19.5	17	7.5	30.5	6	17	10	10
RP513810G	10	G3/8	19.5	20	7.5	27	8	17	10	10
RP511210G	10	G1/2	19.5	24	10	30	8	17	10	10
RP511412G	12	G1/4	23	17	7.5	33	6	21	10	10
RP513812G	12	G3/8	23	20	7.5	28	8	21	10	10
RP511212G	12	G1/2	23	24	10	30.5	8	21	10	10
RP513814G	14	G3/8	23	22	7.5	32.5	8	22	10	10
RP511214G	14	G1/2	23	24	10	30	10	24	10	10
RP511215G	15	G1/2	27	24	10	31.5	10	24	10	10
RP513816G	16	G3/8	27	20	7.5	35	8	24	10	10
RP511216G	16	G1/2	27	24	10	37	10	24	10	10



Raccordi ad innesto rapido in polimero (grigio)

Plastic push-in fittings (grey)

Steckverschraubungen Kunststoff (grau)

RP **52-G**

new




Femmina diritto

Female straight

Manometerverschraubung

Codice/Code	ØD	G"	L1	L2	ØD1				
RP521804G	4	G1/8	8.5	24	10	14			10
RP52M506G	6	M5	5.5	21.5	12	12			10
RP521806G	6	G1/8	8.5	24.5	12	14			10
RP521406G	6	G1/4	11	27	12	17			10
RP521808G	8	G1/8	8.5	26	14	14			10
RP521408G	8	G1/4	11	28.5	14	17			10
RP523808G	8	G3/8	12	29.5	14	21			10
RP521410G	10	G1/4	11	32.7	17	17			10
RP523810G	10	G3/8	12	33	17	21			10
RP521210G	10	G1/2	14	35.7	17	24			10
RP521212G	12	G1/2	14	36.5	20	24			10



RP **53-G**

new




Diritto intermedio

Straight intermediate

Gerader Verbinder

Codice/Code	ØD	ØD1	ØD2	L					
RP530004G	4	4	11.5	34					10
RP530006G	6	6	13.5	35.5					10
RP530008G	8	8	15	38.5					10
RP530010G	10	10	19	48					10
RP530012G	12	12	21.5	49					10
RP530014G	14	14	23.5	50					10
RP530015G	15	15	26.5	66					10
RP530016G	16	16	26.5	66					10
RP530604G	6	4	13.5	35.5					10
RP530804G	8	4	15	38.5					10
RP530806G	8	6	15	38.5					10
RP531006G	10	6	19	46					10
RP531008G	10	8	19	47					10
RP531208G	12	8	21.5	48					10
RP531210G	12	10	21.5	49					10

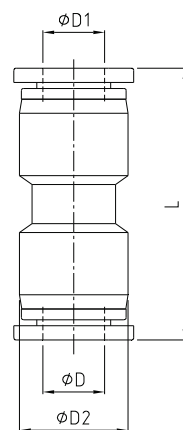

RP **54-G**

new




L intermedio

L intermediate

Winkerverbinder

Codice/Code	ØD	ØD1	ØD2	L1	L2				
RP540004G	4	11.5	3.2	19	7				10
RP540006G	6	13.5	3.2	19.2	8				10
RP540008G	8	15	3.2	22.5	10				10
RP540010G	10	19	4.2	27.8	12				10
RP540012G	12	21.5	4.2	29.5	13.5				10
RP540014G	14	23.5		30.5					10
RP540015G	15	26.5		33					10
RP540016G	16	26.5		33					10



Raccordi ad innesto rapido in polimero (grigio)

Plastic push-in fittings (grey)
Steckverschraubungen Kunststoff (grau)

RP-G


RP **55-G**

new



T intermedio
T intermediate
T-Verbinder

Codice/Code	ØD	ØD1	ØD2	ØD3	L1	L2	L3	L4	
RP550004G	4	4	11.5	3.2	38	14	19	7	10
RP550006G	6	6	13.5	3.2	39	16	19.2	8	10
RP550008G	8	8	15	3.2	45	18	22.5	9	10
RP550010G	10	10	19	4.2	57	24	27.8	12	10
RP550012G	12	12	21.5	4.3	59	27	29.5	13.5	10
RP550014G	14	14	23.5		54		30		10
RP550015G	15	15	26.5		66		33		10
RP550016G	16	16	26.5		66		33		10
RP550604G	6	4	13.5	3.2	39	16	19.2	8	10
RP550804G	8	4	15	3.2	45	18	22.5	9	10
RP550806G	8	6	15	3.2	45	18	22.5	9	10
RP551006G	10	6	19	4.2	57	24	26.3	12	10
RP551008G	10	8	19	4.2	57	24	26.8	12	10
RP551208G	12	8	21.5	4.3	59	27	28.5	13.5	10
RP551210G	12	10	21.5	4.3	59	27	29.5	13.5	10

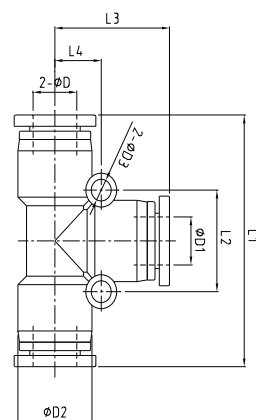


RP **58-G**

new



Adattatore riduzione-maggiorazione
Reducer-increaser plug-in
Reduzier Stecker

Codice/Code	ØD	ØD1	ØD2	L1	L2				
RP580604G	4	6	10	16	35				10
RP580804G	4	8	10	13	34				10
RP580806G	6	8	12	15.5	36				10
RP581006G	6	10	12	16.8	41				10
RP581008G	8	10	14	17.5	42				10
RP581208G	8	12	14	17.5	42.5				10
RP581210G	10	12	17	21	46				10

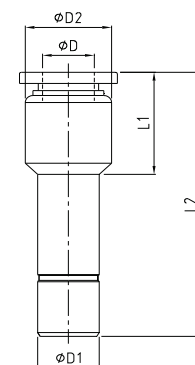


RP **60-G**

new



Passalamiera
Union bulkhead
Schottverschraubung

Codice/Code	ØD	ØD1	M	L	L1	L2			
RP600004G	4	10	M12X1	30.5	9.5	10	14		10
RP600006G	6	12	M14X1	31	7.5	10.6	17		10
RP600008G	8	14	M16X1	34.5	6.5	12	19		10
RP600010G	10	17	M20X1	41.5	11.5	12	24		10
RP600012G	12	20	M22X1	44.5	12.5	13.5	26		10




RP **61-G**

new



Passalamiera femmina
Female union bulkhead
Schottverschraubung Innengewinde

Codice/Code	ØD	G"	L	L1	L2	ØD1	1	2	M	
RP611804G	4	G1/8	23.5	8.5	5	10	14	14	M12X1	10
RP611806G	6	G1/8	24.8	8.5	7	12	17	17	M14X1	10
RP611406G	6	G1/4	29.5	11	7	12	17	17	M14X1	10
RP611408G	8	G1/4	32	11	9	14	19	19	M16X1	10
RP613810G	10	G3/8	34	12	9	17	24	24	M20X1	10
RP611212G	12	G1/2	37	14	9	20	24	26	M22X1	10



Raccordi ad innesto rapido in polimero (grigio)

Plastic push-in fittings (grey)

Steckverschraubungen Kunststoff (grau)

RP **62-G**

new




Passalamiera gomito

Elbow union bulkhead

Winkel Schottverschraubung

Codice/Code	ØD	ØD1	ØD2	L	L1	L2	M		
RP620004G	4	11.5	10	19	31	6	M12X1	14	10
RP620006G	6	13.5	12	19.2	34.5	7	M14X1	17	10
RP620008G	8	15	14	22.5	41	7.5	M16X1	19	10
RP620010G	10	19	17	28.5	47	9.5	M20X1	24	10



RP **65-G**

new




Gomito maschio cilindrico BSPP-metrico

Elbow male parallel BSPP-metric

Winkelverschraubung Drehbar zylindrisches Gewinde

Codice/Code	ØD	G"	L1	L2	L3	L4	ØD1		
RP65M504G	4	M5	3.5	10.7	17.3	20.5	11.5	8	10
RP651804G	4	G1/8	5.5	14.5	23	23.5	11.5	12	10
RP65M506G	6	M5	3.5	11.7	17.3	22	13.5	8	10
RP651806G	6	G1/8	5.5	14.5	23	23.5	13.5	12	10
RP651406G	6	G1/4	7.5	16.7	26.3	25.4	13.5	14	10
RP651808G	8	G1/8	5.5	15.2	23	26.5	15	12	10
RP651408G	8	G1/4	7.5	18	26.3	28.9	15	14	10
RP651410G	10	G1/4	7.5	20	26.3	32.6	19	14	10

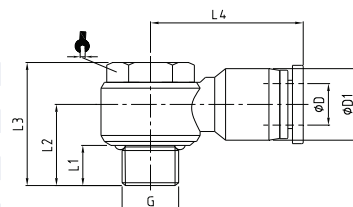

RP **70-G**

new




T al centro maschio girevole cilindrico BSPP-metrico

Central T male (rotating body) parallel BSPP-metric

T-Einschraubverschraubung Drehbar zylindrisches Gewinde

Codice/Code	ØD	G"	L1	L2	L3	ØD1			
RP70M504G	4	M5	3.5	21.3	38	11.5	10		10
RP701804G	4	G1/8	5.5	24.3	38	11.5	14		10
RP70M506G	6	M5	3.5	21.7	39	13.5	12		10
RP701806G	6	G1/8	5.5	24.2	39	13.5	14		10
RP701406G	6	G1/4	7.5	26.7	39	13.5	17		10
RP701808G	8	G1/8	5.5	27	45	15	14		10
RP701408G	8	G1/4	7.5	29.5	45	15	17		10
RP701410G	10	G1/4	7.5	34.8	57	19	17		10
RP703810G	10	G3/8	7.5	34.8	57	19	20		10
RP701412G	12	G1/4	7.5	36	59	21.5	21		10
RP703812G	12	G3/8	7.5	36	59	21.5	21		10



RP **71-G**

new




T laterale maschio girevole cilindrico BSPP-metrico

Lateral T male (rotating body) parallel BSPP-metric

T-Verschraubung Drehbar, zylindrisches Gewinde

Codice/Code	ØD	G"	L1	L2	L3	L4	ØD1		
RP711804G	4	G1/8	5.5	24.3	43.3	19	11.5	14	10
RP711806G	6	G1/8	5.5	24.2	43.4	19.2	13.5	14	10
RP711406G	6	G1/4	7.5	26.7	46	19.2	13.5	17	10
RP711808G	8	G1/8	5.5	27	49.5	22.5	15	14	10
RP711408G	8	G1/4	7.5	29.5	52	22.5	15	17	10
RP711410G	10	G1/4	7.5	35	63.5	27.8	19	17	10
RP713810G	10	G3/8	7.5	35	63.5	27.8	19	20	10
RP711212G	12	G1/2	10	39	68.5	29.5	21.5	24	10



RP 72K-G new




Gomito maschio girevole conico BSPT

Elbow male (rotating body) taper BSPT

Winkelverschraubung Drehbar, konisches Gewinde

Codice/Code	ØD	R"	L1	L2	L3	ØD1			
RP72K1804G	4	R1/8	7.5	20.5	19	11.5	10		10
RP72K1404G	4	R1/4	9.5	20	19	11.5	14		10
RP72K1806G	6	R1/8	7.5	21.5	19.2	13.5	10		10
RP72K1406G	6	R1/4	9.5	21	19.2	13.5	14		10
RP72K3806G	6	R3/8	10.5	22	19.2	13.5	17		10
RP72K1808G	8	R1/8	7.5	22.2	22.5	15	12		10
RP72K1408G	8	R1/4	9.5	21.7	22.5	15	14		10
RP72K3808G	8	R3/8	10.5	22.7	22.5	15	17		10
RP72K1208G	8	R1/2	13.5	26.2	22.5	15	21		10
RP72K1810G	10	R1/8	7.5	26.9	27.8	19	14		10
RP72K1410G	10	R1/4	9.5	28.4	27.8	19	14		10
RP72K3810G	10	R3/8	10.5	24.7	27.8	19	17		10
RP72K1210G	10	R1/2	13.5	28.2	27.8	19	21		10
RP72K1412G	12	R1/4	9.5	29.7	29.5	21.5	15		10
RP72K3812G	12	R3/8	10.5	26	29.5	21.5	17		10
RP72K1212G	12	R1/2	13.5	29.5	29.5	21.5	21		10
RP72K3814G	14	R3/8	10.5	40.5	30.5	23.5	22		10
RP72K1214G	14	R1/2	10	42.5	30.5	23.5	22		10
RP72K1215G	15	R1/2	13.5	43.5	33	26.5	24		10
RP72K3816G	16	R3/8	10.5	44	33	26.5	24		10
RP72K1216G	16	R1/2	13.5	47	33	26.5	24		10



RP 72-G new




Gomito maschio girevole cilindrico BSPP-metrico

Elbow male (rotating body) parallel BSPP-metric

Winkelverschraubung Drehbar, zylindrisches Gewinde

Codice/Code	ØD	G"	L1	L2	L3	ØD1			
RP72M504G	4	M5	3.5	20	19	11.5	10		10
RP72M604G	4	M6	4	20.5	19	11.5	10		10
RP721804G	4	G1/8	5.5	22	19	11.5	14		10
RP721404G	4	G1/4	7.5	19.5	19	11.5	17		10
RP723804G	4	G3/8	7.5	20	19	11.5	20		10
RP72M506G	6	M5	3.5	21	19.2	13.5	10		10
RP72M606G	6	M6	4	21.5	19.2	13.5	10		10
RP721806G	6	G1/8	5.5	23	19.2	13.5	14		10
RP721406G	6	G1/4	7.5	20.5	19.2	13.5	17		10
RP723806G	6	G3/8	7.5	21	19.2	13.5	20		10
RP721808G	8	G1/8	5.5	23.7	22.5	15	14		10
RP721408G	8	G1/4	7.5	21.2	22.5	15	17		10
RP723808G	8	G3/8	7.5	21.7	22.5	15	20		10
RP721208G	8	G1/2	10	24.2	22.5	15	24		10
RP721810G	10	G1/8	5.5	26	27.8	19	14		10
RP721410G	10	G1/4	7.5	28	27.8	19	17		10
RP723810G	10	G3/8	7.5	23.7	27.8	19	20		10
RP721210G	10	G1/2	10	26.2	27.8	19	24		10
RP721412G	12	G1/4	7.5	29.2	29.5	21.5	17		10
RP723812G	12	G3/8	7.5	25	29.5	21.5	20		10
RP721212G	12	G1/2	10	27.5	29.5	21.5	24		10
RP723814G	14	G3/8	7.5	39	30.5	23.5	22		10
RP721214G	14	G1/2	10	42.5	30.5	23.5	24		10
RP721215G	15	G1/2	10	44.5	33	26.5	24		10
RP721216G	16	G1/2	10	44.5	33	26.5	24		10



RP 72P-G new




Gomito maschio girevole lungo cilindrico BSPP-metrico

Elbow male (rotating body) parallel BSPP-metric

Winkelverschraubung Lang Drehbar zylindrisches Gewinde

Codice/Code	ØD	G"	L1	L2	L3	ØD1			
RP72P1806G	6	G1/8	5.5	37.7	19.2	13.5	14		10
RP72P1406G	6	G1/4	7.5	40.2	19.2	13.5	17		10
RP72P1808G	8	G1/8	5.5	42.3	22.5	15	14		10
RP72P1408G	8	G1/4	7.5	44.3	22.5	15	17		10
RP72P3810G	10	G3/8	7.5	54.3	27.8	19	20		10
RP72P3812G	12	G3/8	7.5	59.5	29.5	21.5	21		10

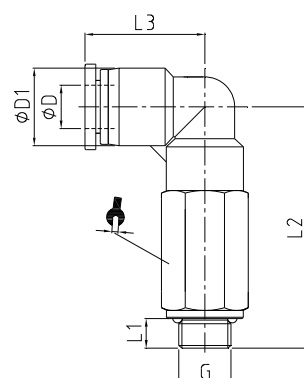

Raccordi ad innesto rapido in polimero (grigio)

Plastic push-in fittings (grey)

Steckverschraubungen Kunststoff (grau)

RP 72F-G new




Gomito femmina girevole cilindrico BSPP-metrico

Elbow female (rotating body) parallel BSPP-metric

Winkelverschraubung Innengewinde, zylindrisches Gewinde

Codice/Code	ØD	G"	L1	L2	L3	ØD1			
RP72F1804G	4	G1/8	8.5	23.3	19	11.5	14		10
RP72F1806G	6	G1/8	8.5	22.7	19.2	13.5	14		10
RP72F1406G	6	G1/4	11	25.7	19.2	13.5	17		10
RP72F1808G	8	G1/8	8.5	25	22.5	15	14		10
RP72F1408G	8	G1/4	11	28.5	22.5	15	17		10
RP72F3810G	10	G3/8	12	33.8	27.8	19	21		10
RP72F1210G	10	G1/2	14	36.8	27.8	19	24		10
RP72F1212G	12	G1/2	14	38	29.5	21.5	24		10



RP 73-G new




Y innestabile

Y connector

Y-Verteiler

Codice/Code	ØD	ØD1	ØD2	ØD3	L1	L2	L3		
RP730004G	4	4	11.5	3.2	36.5	11	14.5		10
RP730006G	6	6	13.5	3.2	37.5	13	15		10
RP730008G	8	8	15	3.2	39.8	15	18		10
RP730010G	10	10	19	4.2	50	18	21		10
RP730012G	12	12	21.5	4.2	53	21	21.5		10
RP730604G	6	4	13.5	3.2	37.5	13	15		10
RP730806G	8	6	15	3.2	39.8	15	18		10
RP731008G	10	8	19	4.2	50	18	21		10
RP731210G	12	10	21.5	4.2	53	21	21.5		10

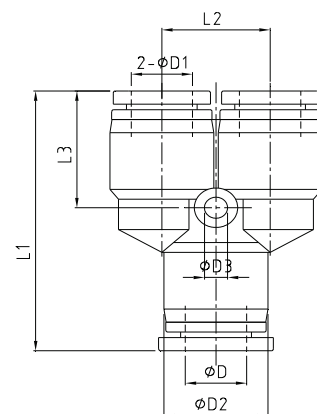

RP 91-G new




Y pari con codolo

Y with plug-in

Y-Verteiler

Codice/Code	ØD	ØD1	ØD2	ØD3	L1	L2	L3	L4	
RP910004G	4	4	11.5	3.2	52.5	33.5	14.5	11	10
RP910006G	6	6	13.5	3.2	53.8	34.8	15	13	10
RP910008G	8	8	15	3.2	57.8	37.3	18	15	10
RP910010G	10	10	19	4.2	71	46.5	21	18	10
RP910012G	12	12	21.5	4.2	75.5	49.5	21.5	21	10

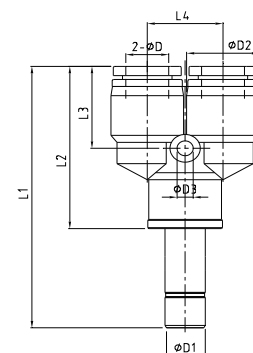

RP 74-G new




Y maschio girevole cilindrico BSPP-metrico

Y male (rotating body) parallel BSPP-metric

Y Einschraubverschraubung Drehbar, zylindrisches Gewinde

Codice/Code	ØD	G"	L1	L2	L3	L4	ØD1	ØD2		
RP741804G	4	G1/8	5.5	11	43	14.5	11.5	3.2	14	10
RP741806G	6	G1/8	5.5	13	44	15	13.5	3.2	14	10
RP741406G	6	G1/4	7.5	13	46.5	15	13.5	3.2	17	10
RP741808G	8	G1/8	5.5	15	46.3	18	15	3.2	14	10
RP741408G	8	G1/4	7.5	15	48.8	18	15	3.2	17	10
RP741410G	10	G1/4	7.5	18	58.5	21	19	4.2	17	10
RP743810G	10	G3/8	7.5	18	58.5	21	19	4.2	20	10
RP743812G	12	G3/8	7.5	21	62	21.5	21.5	4.2	21	10



RP 83-G

new




Doppio L maschio girevole cilindrico BSPP

Double L male (rotating body) parallel BSPP

Winkelverschraubung 2-Fach Drehbar, zylindrisches Gewinde

Codice/Code	ØD	G"	L1	L2	L3	L4	L5	ØD1		
RP831804G	4	G1/8	5.5	14	15	38	23.5	11.5	12	10
RP831806G	6	G1/8	5.5	14	15	38	23.5	13.5	12	10
RP831406G	6	G1/4	7.5	17.3	15	41.5	25.4	13.5	14	10
RP831808G	8	G1/8	5.5	15	15	38	26.5	15	12	10
RP831408G	8	G1/4	7.5	18.3	15	41.5	29	15	14	10
RP831410G	10	G1/4	7.5	20	21.5	44.8	32.5	19	14	10



RP 85-G

new




L intermedio con codolo

L intermediate with plug-in

Winkelanschluss

Codice/Code	ØD	ØD1	ØD2	L1	L2					
RP850004G	4	4	11.5	33.7	19					10
RP850006G	6	6	13.5	34	19.2					10
RP850008G	8	8	15	38.5	22.5					10
RP850010G	10	10	19	46.8	27.8					10
RP850012G	12	12	21.5	49.5	29.5					10



RP 88-G

new




Croce intermedio

Cross intermediate

Kreuzverteiler

Codice/Code	ØD	ØD1	ØD2	L1	L2	L3				
RP880004G	4	11.5	3.2	38	14	7				10
RP880006G	6	13.5	3.2	39	16	8				10
RP880008G	8	15	3.2	45	18	9				10
RP880010G	10	19	4.2	57	24	12				10
RP880012G	12	21.5	4.3	59	27	13.5				10



RP 89-G

new



T multiplo

Multi T

T Mehrfachverteiler

Codice/Code	ØD	ØD1	ØD2	ØD3	ØD4	L1	L2	L3	H1	H2	
RP890604G	6	4	14.5	13	3.2	58	36	22	19	8	10
RP890804G	8	4	18.4	14.5	3.2	62	42	26	20.5	9	10
RP890806G	8	6	18.4	14.5	3.2	81	48	29	24.5	9	10
RP891006G	10	6	19	14.5	4.2	87	61	29	24.5	11.5	10
RP891008G	10	8	19	14.5	4.2	87	61	29	24.5	11.5	10

