

## Dati tecnici accessori in ottone giallo

Yellow brass accessories technical data  
Technische Daten der Standardverschraubungen Messing gelb

|                                                                           |                                                                            |                                                                          |
|---------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <b>Applicazioni</b><br>Pneumatica (idraulica a bassa pressione)           | <b>Applications</b><br>Pneumatic (hydraulic system with low pressure)      | <b>Anwendungen</b><br>Pneumatisch (hydraulische Niederdruck)             |
| <b>Materiali</b><br>Corpo Ottone CW614N / CW617N                          | <b>Materials</b><br>Body Brass CW614N / CW617N                             | <b>Werkstoffe</b><br>Körper Messing CW614N / CW617N                      |
| <b>Filettatura</b><br>BSPP cilindrica UNI-ISO228<br>BSPT conica UNI-ISO 7 | <b>Thread types</b><br>BSPP cylindrical UNI-ISO228<br>BSPT taper UNI-ISO 7 | <b>Gewinden</b><br>BSPP zylindrisch UNI-ISO228<br>BSPT konisch UNI-ISO 7 |
| <b>Filetti</b><br>Filettature da 1/4" a 4"                                | <b>Threads</b><br>Threads from 1/4" to 4"                                  | <b>Gewinde</b><br>Gewinde von 1/4" bis 4"                                |

| DIMENSIONI<br>Dimensions - Maße |              | PRESSIONE DI ESERCIZIO - BAR<br>Working pressure - Betriebsdruck |                            |
|---------------------------------|--------------|------------------------------------------------------------------|----------------------------|
| da / from / von                 | a / to / bis | fino a / until / bis 120°C                                       | fino a / until / bis 225°C |
| 1/4"                            | 3/4"         | 25                                                               | 16                         |
| 1"                              | 2"           | 16                                                               | 10                         |
| 2" 1/2                          | 4"           | 10                                                               | 6                          |

# Accessori in ottone giallo

Yellow brass accessories

Standardverschraubungen Messing gelb


AS **11-G**



## Portagomma maschio tipo roma ottone giallo

Yellow brass roma male hose adaptor  
Schlauchtülle mit Außengewinde

|     | Codice/Code | A"    | E   | F    | W    | C     | gr.  |   |    |
|-----|-------------|-------|-----|------|------|-------|------|---|----|
| new | AS111810G   | 1/8   | 10  | 8    | 15   | 30    | 10   |   | 10 |
| new | AS111406G   | 1/4   | 6   | 8    | 15   | 31,5  | 11   |   | 10 |
| new | AS111408G   | 1/4   | 8   | 8    | 15   | 34    | 14   |   | 10 |
| new | AS111410G   | 1/4   | 10  | 9    | 15   | 37    | 18   |   | 10 |
| new | AS111412G   | 1/4   | 12  | 9    | 15   | 37    | 23   |   | 10 |
| new | AS111413G   | 1/4   | 13  | 9    | 15   | 37    | 23   |   | 10 |
| new | AS111414G   | 1/4   | 14  | 9    | 15   | 37    | 24   |   | 10 |
| new | AS113810G   | 3/8   | 10  | 8,5  | 19   | 38    | 25   |   | 10 |
| new | AS113812G   | 3/8   | 12  | 8,5  | 19   | 38    | 25   |   | 10 |
| new | AS113813G   | 3/8   | 13  | 8,5  | 19   | 38    | 22   |   | 10 |
| new | AS113814G   | 3/8   | 14  | 9    | 17   | 37,5  | 27   |   | 10 |
|     | AS113815G   | 3/8   | 15  | 8,5  | 19   | 38    | 27   |   | 10 |
| new | AS113816G   | 3/8   | 16  | 9,5  | 19   | 39,5  | 32   |   | 10 |
| new | AS113818G   | 3/8   | 18  | 10,5 | 19   | 40    | 32   |   | 10 |
| new | AS113820G   | 3/8   | 20  | 10,5 | 22   | 40,5  | 35   |   | 10 |
| new | AS111210G   | 1/2   | 10  | 9,5  | 16   | 43    | 36   |   | 10 |
| new | AS111212G   | 1/2   | 12  | 9,5  | 16   | 43    | 38   |   | 10 |
| new | AS111213G   | 1/2   | 13  | 9,5  | 16   | 43,5  | 37   |   | 10 |
| new | AS111214G   | 1/2   | 14  | 9,5  | 18   | 44,5  | 35   |   | 10 |
| new | AS111215G   | 1/2   | 15  | 9,5  | 18   | 44,5  | 38   |   | 10 |
| new | AS111216G   | 1/2   | 16  | 9,5  | 18   | 44,5  | 35   |   | 10 |
|     | AS111218G   | 1/2   | 18  | 9,5  | 20   | 47,5  | 45   |   | 10 |
|     | AS111220G   | 1/2   | 20  | 9,5  | 22   | 50    | 49   |   | 10 |
| new | AS113413G   | 3/4   | 13  | 10   | 22   | 44,5  | 49   |   | 10 |
| new | AS113414G   | 3/4   | 14  | 10   | 22   | 44,5  | 49   |   | 10 |
| new | AS113416G   | 3/4   | 16  | 10   | 22   | 47,5  | 58   |   | 10 |
| new | AS113418G   | 3/4   | 18  | 10   | 23   | 53    | 67   |   | 10 |
| new | AS113419G   | 3/4   | 19  | 10   | 23   | 53    | 57   |   | 10 |
|     | AS113420G   | 3/4   | 20  | 10   | 23   | 53    | 62   |   | 10 |
| new | AS113422G   | 3/4   | 22  | 10   | 23   | 48    | 61   |   | 10 |
|     | AS113425G   | 3/4   | 25  | 10   | 27   | 56    | 81   |   | 10 |
|     | AS110120G   | 1     | 20  | 13   | 28   | 55    | 99   |   | 10 |
|     | AS110125G   | 1     | 25  | 13   | 28   | 58    | 94   |   | 10 |
|     | AS110130G   | 1     | 30  | 13   | 32   | 60    | 104  |   | 10 |
| new | AS110132G   | 1     | 32  | 13,5 | 36   | 63    | 109  |   | 10 |
| new | AS110135G   | 1     | 35  | 13,5 | 36   | 63    | 147  |   | 10 |
|     | AS114130G   | 1.1/4 | 30  | 15,5 | 38   | 69    | 154  | 2 |    |
| new | AS114132G   | 1.1/4 | 32  | 15,5 | 38   | 69    | 163  | 2 |    |
|     | AS114135G   | 1.1/4 | 35  | 15,5 | 38   | 70    | 165  | 2 |    |
| new | AS114138G   | 1.1/4 | 38  | 15,5 | 38   | 70    | 153  | 2 |    |
| new | AS114139G   | 1.1/4 | 39  | 15,5 | 38   | 70    | 156  | 2 |    |
|     | AS114140G   | 1.1/4 | 40  | 15,5 | 42   | 70    | 164  | 2 |    |
| new | AS112135G   | 1.1/2 | 35  | 15,5 | 40   | 70    | 205  | 2 |    |
| new | AS112138G   | 1.1/2 | 38  | 15,5 | 44   | 76    | 219  | 2 |    |
|     | AS112140G   | 1.1/2 | 40  | 15,5 | 44   | 76    | 201  | 2 |    |
| new | AS112145G   | 1.1/2 | 45  | 12   | 46,5 | 75    | 213  | 2 |    |
|     | AS112150G   | 1.1/2 | 50  | 14   | 52   | 74,5  | 278  | 2 |    |
|     | AS110250G   | 2     | 50  | 14   | 52   | 73    | 269  | 2 |    |
|     | AS110260G   | 2     | 60  | 14   | 62   | 84    | 430  | 2 |    |
|     | AS112260G   | 2.1/2 | 60  | 16   | 65   | 94    | 533  | 2 |    |
| new | AS112265G   | 2.1/2 | 65  | 16   | 70   | 96    | 618  | 2 |    |
|     | AS112270G   | 2.1/2 | 70  | 16   | 77   | 98    | 640  | 2 |    |
| new | AS112275G   | 2.1/2 | 75  | 16   | 77   | 98    | 663  | 2 |    |
|     | AS110380G   | 3     | 80  | 19   | 85   | 108   | 839  | 2 |    |
| new | AS110390G   | 3     | 90  | 18,5 | 92   | 110   | 942  | 2 |    |
| new | AS110410G   | 4     | 100 | 18   | 105  | 119,5 | 1374 | 2 |    |

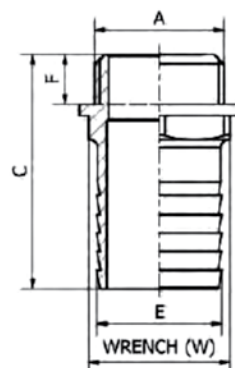


## AS 12-G



### Portagomma femmina tipo roma ottone giallo

Yellow brass roma female hose adaptor  
Schlauchtülle Innengewinde

|     | Code/Code | A"    | E  | F    | W  | C  | gr. |    |  |
|-----|-----------|-------|----|------|----|----|-----|----|--|
| new | AS121810G | 1/8   | 10 | 11   | 14 | 32 | 17  | 10 |  |
| new | AS121410G | 1/4   | 10 | 10,5 | 17 | 35 | 22  | 10 |  |
| new | AS121413G | 1/4   | 13 | 10,5 | 15 | 33 | 16  | 10 |  |
| new | AS121414G | 1/4   | 14 | 10,5 | 19 | 36 | 21  | 10 |  |
| new | AS123810G | 3/8   | 10 | 10,5 | 19 | 36 | 22  | 10 |  |
| new | AS123812G | 3/8   | 12 | 10,5 | 19 | 36 | 23  | 10 |  |
| new | AS123813G | 3/8   | 13 | 10   | 19 | 36 | 24  | 10 |  |
| new | AS123814G | 3/8   | 14 | 10   | 19 | 36 | 25  | 10 |  |
|     | AS123815G | 3/8   | 15 | 10   | 19 | 36 | 26  | 10 |  |
| new | AS121210G | 1/2   | 10 | 10   | 24 | 39 | 32  | 10 |  |
| new | AS121212G | 1/2   | 12 | 10   | 24 | 39 | 30  | 10 |  |
| new | AS121213G | 1/2   | 13 | 10   | 24 | 39 | 32  | 10 |  |
| new | AS121214G | 1/2   | 14 | 10   | 24 | 38 | 34  | 10 |  |
|     | AS121215G | 1/2   | 15 | 10   | 24 | 43 | 36  | 10 |  |
|     | AS121218G | 1/2   | 18 | 10   | 24 | 43 | 44  | 10 |  |
| new | AS121220G | 1/2   | 20 | 10   | 24 | 44 | 40  | 10 |  |
|     | AS123420G | 3/4   | 20 | 10   | 28 | 45 | 50  | 10 |  |
|     | AS123425G | 3/4   | 25 | 10   | 29 | 51 | 57  | 10 |  |
|     | AS120125G | 1     | 25 | 11   | 36 | 51 | 86  | 10 |  |
|     | AS120130G | 1     | 30 | 11   | 36 | 57 | 101 | 10 |  |
| new | AS124130G | 1.1/4 | 30 | 12   | 46 | 57 | 140 | 2  |  |
| new | AS124132G | 1.1/4 | 32 | 12   | 46 | 57 | 144 | 2  |  |
| new | AS124135G | 1.1/4 | 35 | 12   | 46 | 57 | 163 | 2  |  |
| new | AS124140G | 1.1/4 | 40 | 12   | 46 | 63 | 171 | 2  |  |
| new | AS122138G | 1.1/2 | 38 | 12   | 51 | 64 | 167 | 2  |  |
| new | AS122140G | 1.1/2 | 40 | 12   | 51 | 64 | 170 | 2  |  |
| new | AS120250G | 2     | 50 | 12   | 62 | 70 | 296 | 2  |  |




## AS 13-G



### Raccordo portagomma 3 pz. sede conica ottone giallo

Yellow brass conic seat 3 parts hose connector  
Schlauchtülle dreiteilig, mit konisches Gewindeisen Sitz

| Code/Code | E  | D  | C  | gr. |  |  |  |    |
|-----------|----|----|----|-----|--|--|--|----|
| AS130015G | 15 | 15 | 36 | 59  |  |  |  | 10 |
| AS130020G | 20 | 20 | 44 | 92  |  |  |  | 10 |
| AS130025G | 25 | 25 | 52 | 152 |  |  |  | 10 |
| AS130030G | 30 | 30 | 68 | 258 |  |  |  | 10 |




## AS 14-G



### Raccordo pompe excelsior diritto ottone giallo

Yellow brass excelsior pumps straight pipe fittings  
Verschraubung Excelsior gerade für Pumpen

| Code/Code | A"    | E  | F  | C  | D   | gr. |    |  |
|-----------|-------|----|----|----|-----|-----|----|--|
| AS141215G | 1/2   | 15 | 10 | 37 | 59  | 74  | 10 |  |
| AS141218G | 1/2   | 18 | 10 | 45 | 65  | 94  | 10 |  |
| AS143420G | 3/4   | 20 | 10 | 44 | 66  | 94  | 10 |  |
| AS143425G | 3/4   | 25 | 10 | 52 | 74  | 162 | 10 |  |
| AS140125G | 1     | 25 | 13 | 52 | 78  | 186 | 10 |  |
| AS140130G | 1     | 30 | 12 | 68 | 84  | 267 | 10 |  |
| AS144130G | 1*1/4 | 30 | 12 | 68 | 89  | 259 | 2  |  |
| AS144135G | 1*1/4 | 35 | 12 | 68 | 87  | 288 | 2  |  |
| AS142140G | 1*1/2 | 40 | 13 | 82 | 96  | 427 | 2  |  |
| AS140250G | 2     | 50 | 14 | 98 | 110 | 583 | 2  |  |

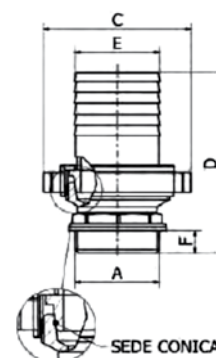

## Accessori in ottone giallo

Yellow brass accessories

Standardverschraubungen Messing gelb


### AS 15-G



#### Raccordo pompe excelsior curvo ottone giallo

Yellow brass excelsior pump bent pipe fitting  
Winkelverschraubung Excelsior für Pumpen

| Codice/Code | A"    | E  | F  | C  | D  | gr. |    |
|-------------|-------|----|----|----|----|-----|----|
| AS151215G   | 1/2   | 15 | 10 | 37 | 57 | 98  | 10 |
| AS151218G   | 1/2   | 18 | 10 | 45 | 60 | 126 | 10 |
| AS153420G   | 3/4   | 20 | 10 | 44 | 64 | 141 | 10 |
| AS153425G   | 3/4   | 25 | 10 | 52 | 71 | 207 | 10 |
| AS150125G   | 1     | 25 | 13 | 52 | 75 | 245 | 10 |
| AS150130G   | 1     | 30 | 12 | 68 | 79 | 375 | 10 |
| AS154130G   | 1 1/4 | 30 | 12 | 68 |    | 367 | 2  |
| AS154135G   | 1 1/4 | 35 | 12 | 68 |    | 392 | 2  |
| AS152140G   | 1 1/2 | 40 | 13 | 82 | 89 | 545 | 2  |
| AS150250G   | 2     | 50 | 14 | 98 | 99 | 888 | 2  |




### AS 16-G



#### Bocchettone diritto m.f. con O-ring ottone giallo

O-ring seal straight m.f. yellow brass pipe union  
Nippel Gerade mit O-Ring

| Codice/Code | A"    | F    | F1 | W  | D  | gr. |    |
|-------------|-------|------|----|----|----|-----|----|
| AS160038G   | 3/8   | 8    | 8  | 23 | 42 | 80  | 10 |
| AS160012G   | 1/2   | 10   | 11 | 25 | 45 | 96  | 10 |
| AS160034G   | 3/4   | 10   | 10 | 30 | 54 | 115 | 10 |
| AS160001G   | 1     | 11   | 15 | 37 | 60 | 212 | 10 |
| AS160041G   | 1 1/4 | 15   | 16 | 48 | 69 | 376 | 10 |
| AS160021G   | 1 1/2 | 16,5 | 20 | 55 | 73 | 541 | 10 |
| AS160002G   | 2     | 18,5 | 20 | 66 | 98 | 654 | 2  |




### AS 17-G



#### Bocchettone curvo m.f. con O-ring ottone giallo

O-ring seal bent m.f. yellow brass pipe union  
Winkelnippel mit O-Ring

| Codice/Code | A"    | F    | W  | C  | D   | gr.  |    |
|-------------|-------|------|----|----|-----|------|----|
| AS170012G   | 1/2   | 9,5  | 37 | 20 | 52  | 121  | 10 |
| AS170034G   | 3/4   | 12   | 46 | 26 | 61  | 196  | 5  |
| AS170001G   | 1     | 12   | 53 | 35 | 72  | 318  | 5  |
| AS170041G   | 1 1/4 | 20   | 64 | 42 | 85  | 525  | 1  |
| AS170021G   | 1 1/2 | 18,5 | 64 | 40 | 89  | 796  | 1  |
| AS170002G   | 2     | 20   | 80 | 70 | 118 | 1554 | 1  |




### AS 18-G



#### Bocchettone diritto f.f. 3 pz. Sede conica ottone giallo

Yellow brass f.f. conic pipe union  
Doppelnippel lösbar, Innengewinde mit konisches Gewindeischn Sitz

| Codice/Code | A/A1" | W  | W1 | D  | F    | gr.  |    |
|-------------|-------|----|----|----|------|------|----|
| AS180012G   | 1/2   | 25 | 37 | 41 | 10   | 139  | 10 |
| AS180034G   | 3/4   | 30 | 47 | 45 | 10   | 209  | 5  |
| AS180001G   | 1     | 38 | 53 | 57 | 11   | 341  | 5  |
| AS180041G   | 1 1/4 | 46 | 64 | 57 | 15   | 437  | 1  |
| AS180021G   | 1 1/2 | 54 | 72 | 57 | 16,5 | 596  | 1  |
| AS180002G   | 2     | 66 | 87 | 69 | 18,5 | 1035 | 1  |




### AS 20-G



#### Prolunga ottone giallo

Yellow brass extension  
Verlängerung

| Code/Code | A"  | E    | F  | F1 | C  | gr. |    |
|-----------|-----|------|----|----|----|-----|----|
| AS201210G | 1/2 | 25   | 10 | 15 | 10 | 31  | 10 |
| AS201215G | 1/2 | 25   | 10 | 15 | 15 | 36  | 10 |
| AS201220G | 1/2 | 25   | 10 | 15 | 20 | 44  | 10 |
| AS201230G | 1/2 | 25   | 10 | 15 | 30 | 64  | 10 |
| AS203410G | 3/4 | 33   | 12 | 15 | 10 | 50  | 10 |
| AS203415G | 3/4 | 33   | 12 | 15 | 15 | 64  | 10 |
| AS203420G | 3/4 | 33   | 12 | 15 | 20 | 78  | 10 |
| AS203430G | 3/4 | 33   | 12 | 15 | 30 | 114 | 10 |
| AS200110G | 1   | 38.5 | 15 | 9  | 10 | 69  | 10 |
| AS200115G | 1   | 38.5 | 15 | 18 | 15 | 91  | 10 |
| AS200120G | 1   | 38.5 | 15 | 17 | 20 | 110 | 10 |
| AS200130G | 1   | 38.5 | 15 | 18 | 30 | 138 | 10 |



### AS 51-G





#### Nipplo cilindrico BSPP ottone giallo

Nipple parallel BSPP yellow brass  
Doppelnippel Zylindrische Gewinde

| Code/Code | A"    | A1"   | F  | F1 | C  | gr. |   |
|-----------|-------|-------|----|----|----|-----|---|
| AS510141G | 1     | 1 1/4 | 18 | 19 | 44 | 144 | 2 |
| AS514121G | 1 1/4 | 1 1/2 | 17 | 15 | 40 | 120 | 2 |
| AS512102G | 1 1/2 | 2     | 17 | 18 | 43 | 5   | 2 |

| Code/Code | A"    | F  | W   | E  | C  | gr.  |   |
|-----------|-------|----|-----|----|----|------|---|
| AS514141G | 1 1/4 | 16 | 42  | 34 | 39 | 138  | 2 |
| AS512121G | 1 1/2 | 16 | 48  | 41 | 39 | 146  | 2 |
| AS510202G | 2     | 18 | 60  | 51 | 43 | 231  | 2 |
| AS512222G | 2 1/2 | 27 | 76  | 63 | 68 | 664  | 1 |
| AS510303G | 3     | 30 | 89  | 74 | 75 | 1009 | 1 |
| AS510404G | 4     | 36 | 115 | 98 | 90 | 1672 | 1 |




### AS 52K-G



#### Nipplo conico BSPT ottone giallo

Nipple taper BSPT yellow brass  
Doppelnippel konisches Gewinde

| Code/Code  | R"    | F    | W  | E  | C  | gr. |   |
|------------|-------|------|----|----|----|-----|---|
| AS52K4141G | 1 1/4 | 22.5 | 47 | 35 | 54 | 205 | 2 |
| AS52K2121G | 1 1/2 | 23   | 55 | 39 | 55 | 295 | 2 |
| AS52K0202G | 2     | 24   | 65 | 50 | 57 | 386 | 2 |




### AS 53-G



#### Manicotto ottone giallo

Sleeve yellow brass  
Muffe

| Code/Code | A"    | E  | C  | gr. |  |  |   |
|-----------|-------|----|----|-----|--|--|---|
| AS534141G | 1 1/4 | 51 | 38 | 171 |  |  | 2 |
| AS532121G | 1 1/2 | 58 | 53 | 280 |  |  | 2 |
| AS530202G | 2"    | 71 | 58 | 490 |  |  | 2 |



## Accessori in ottone giallo

Yellow brass accessories

Standardverschraubungen Messing gelb

### AS 54-G




#### Riduzione maschio-femmina cilindrica BSPP ottone giallo

Reducer male-female parallel BSPP yellow brass

Reduzierung Außen/Innengewinde zylindrisches Gewinde

| Codice/Code | A"    | A1"   | F  | W  | C  | gr. |   |  |
|-------------|-------|-------|----|----|----|-----|---|--|
| AS541241G   | 1/2   | 1"1/4 | 13 | 42 | 24 | 144 | 2 |  |
| AS543441G   | 3/4   | 1"1/4 | 13 | 43 | 23 | 144 | 2 |  |
| AS540141G   | 1     | 1"1/4 | 23 | 42 | 23 | 40  | 2 |  |
| AS540121G   | 1     | 1"1/2 | 14 | 49 | 24 | 120 | 2 |  |
| AS542141G   | 1"1/4 | 1"1/2 | 26 | 48 | 26 | 192 | 2 |  |
| AS540201G   | 1     | 2     | 14 | 60 | 26 | 96  | 2 |  |
| AS540241G   | 1"1/4 | 2     | 15 | 60 | 28 | 96  | 2 |  |
| AS540221G   | 1"1/2 | 2     | 17 | 60 | 26 | 96  | 2 |  |



### AS 57-G




#### Tappo maschio cilindrico esagonale ottone giallo

Hexagon male plug parallel BSPP yellow brass

Stopfen zylindrisches Gewinde

| Codice/Code | A"    | F    | C  | W  | gr. |   |  |  |
|-------------|-------|------|----|----|-----|---|--|--|
| AS570041G   | 1"1/4 | 13.5 | 26 | 39 | 114 | 2 |  |  |
| AS570021G   | 1"1/2 | 13   | 25 | 38 | 145 | 2 |  |  |
| AS570002G   | 2     | 18   | 31 | 38 | 281 | 2 |  |  |



### AS 59-G




#### Gomito femmina cilindrico BSPP ottone giallo

Elbow female parallel BSPP yellow brass

Winkelstück Innengewinde zylindrisches Gewinde

| Codice/Code | A"    | F  | D  | gr. |   |  |  |  |
|-------------|-------|----|----|-----|---|--|--|--|
| AS590041G   | 1"1/4 | 17 | 44 | 310 | 2 |  |  |  |
| AS590021G   | 1"1/2 | 20 | 46 | 383 | 2 |  |  |  |
| AS590002G   | 2     | 22 | 55 | 541 | 2 |  |  |  |



### AS 60K-G




#### Gomito maschio-femmina conico BSPT ottone giallo

Elbow male taper BSPT female parallel BSPP yellow brass

Winkelstück Innengewinde konisches Gewinde

| Codice/Code | A"    | F  | E  | C  | D  | gr. |   |  |
|-------------|-------|----|----|----|----|-----|---|--|
| AS60K0041G  | 1"1/4 | 18 | 50 | 41 | 58 | 320 | 2 |  |
| AS60K0021G  | 1"1/2 | 21 | 58 | 46 | 64 | 411 | 2 |  |
| AS60K0002G  | 2     | 22 | 65 | 55 | 69 | 701 | 2 |  |



### AS 61-G



#### T femmina cilindrico BSPP ottone giallo

T female parallel BSPP yellow brass

T Stück Innengewinde zylindrisches Gewinde

| Codice/Code | A"    | F  | E  | C   | D  | gr. |   |  |
|-------------|-------|----|----|-----|----|-----|---|--|
| AS610041G   | 1"1/4 | 18 | 50 | 84  | 42 | 310 | 2 |  |
| AS610021G   | 1"1/2 | 20 | 58 | 96  | 48 | 472 | 2 |  |
| AS610002G   | 2     | 25 | 65 | 115 | 58 | 769 | 2 |  |

